

CM-WSK701

Multipurpose Heat Detector

ISO9001

Approvals: CE




■ ADVANTAGES

- * 2 in 1 Functions: One detector can detect both heat and smoke.
- * Stable quality and durable: The detector operates in mechanical principle, so it can reduce the malfunction situation.
- * Can avoid false alarm: Special components inside the detector is heat-resistant and moisture proof, which enables prevention of false alarm.

■ DIMENSIONS

Unit:mm

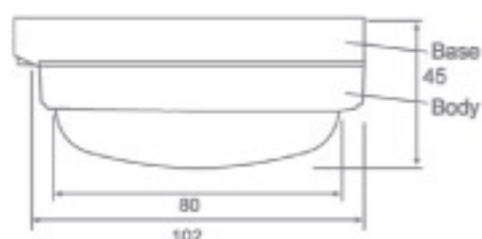

■ SPECIFICATION

MODEL NO.	CM-WSK701			SENSITIVITY SETTING	Comply to EN54, CNS
TYPE	2-wire	3-wire	4-wire	ALARM TEMP.	70°C
VOLTAGE RANGE	12V~30V DC			AMBIENT TEMP.	-10°C ~ +55°C
ALARM CURRENT	24V DC 30mA			AMBIENT HUMIDITY	0 ~95%
CONTACT RATING	N/A		1A@30V DC	MATERIAL	Burning-Proof plastics
POLARIZATION	Non-polarized	Polarized	Non-polarized	DIMENSIONS	102(Dia.) x 45(H)mm
COLOR	White			WEIGHT	132g

■ EFFECTIVE ALERT AREA

HEIGHT/CONSTRUCTION	UNDER 4M	4M ~ 8M
FIRE-PROOF BUILDING	70M ²	35M ²
ORDINARY BUILDING	40M ²	25M ²

■ ORDER INFORMATION

CM-WSK701-31	3-wire with remote indicator output
CM-WSK701-31H	3-wire with self-protection
CM-WSK701-41	4-wire with relay output

CM CHUNG MEI FIRE FIGHTING SUPPLIER CO.,LTD

CATALOG NO.CM-WSK701_20190216