

Addressable Detector

ISO9001  
Approvals: CE

CM-RD-04

CM-RD-01/02




CM-RD-03

## ADVANTAGES

- \* Two-wire communication
- \* Stable communications, noise/interference resistant
- \* Self-test function
- \* Three-color LED indicator : monitoring, alarm, broken circuit
- \* CM-RD-02 is able to connect with conventional detectors

## STRUCTURE

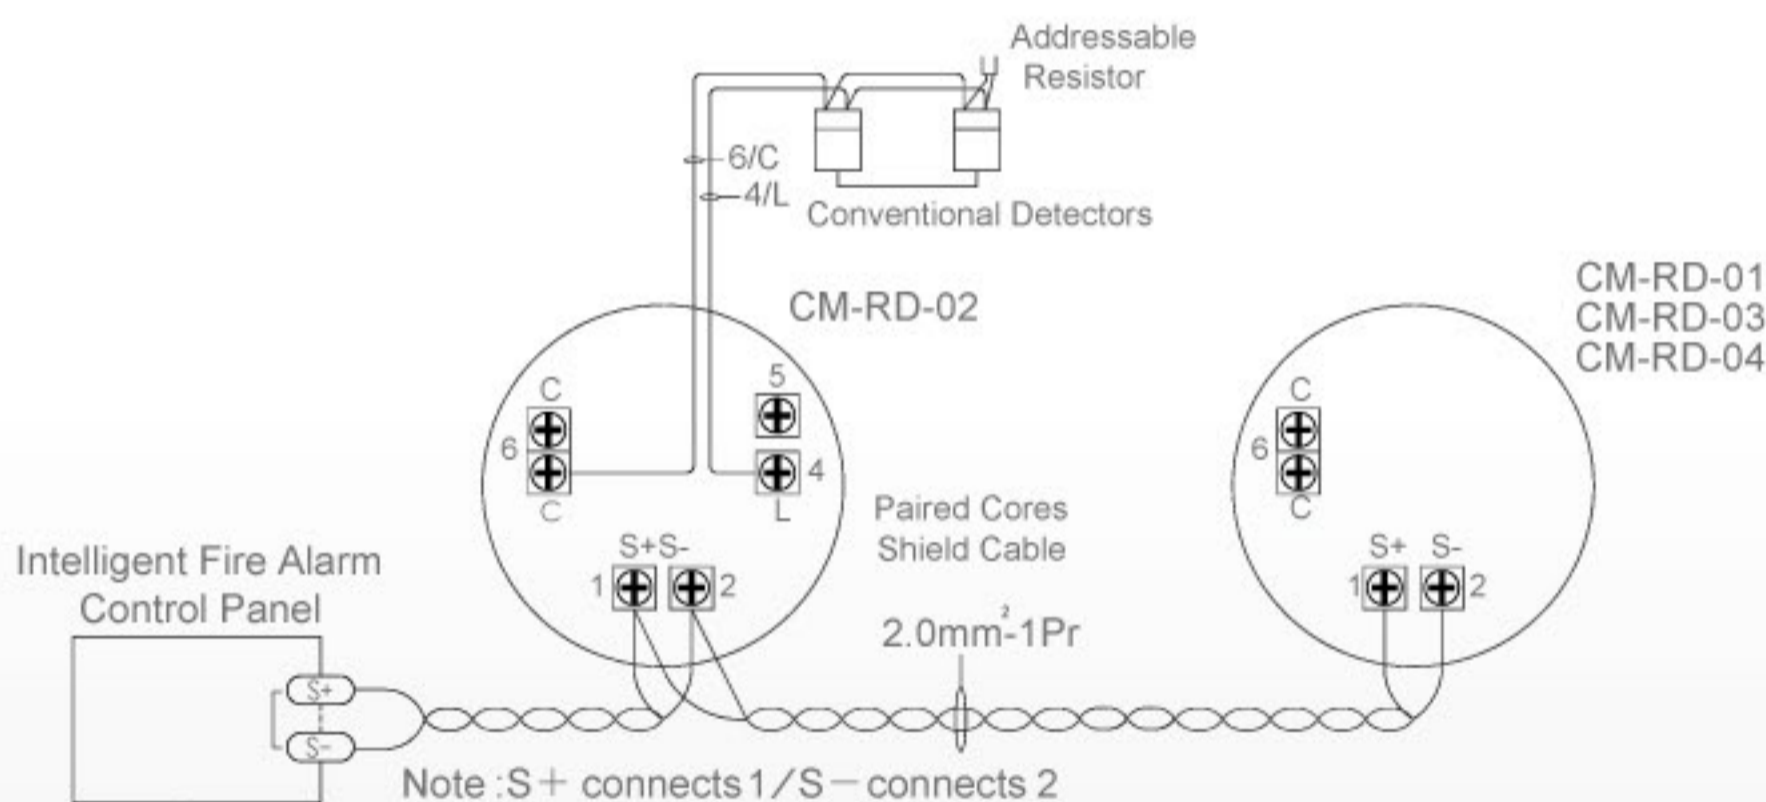

## SPECIFICATION

MODEL NO.	CM-RD-01	CM-RD-02(Expandable)	CM-RD-03	CM-RD-04
DESCRIPTION	Addressable photoelectric smoke detector	Addressable photoelectric smoke detector	Addressable rate-of-rise heat detectors	Addressable fixed-temperature heat detector
ALARMING TEMP.				70°C
POWER INPUT	DC16V~30V			
POWER CONSUMPTION	Static 480μA/DC24V Alarm 7.6mA/DC24V			
STATUS INDICATION	Monitoring: Green LED blinking Alarm: Red LED blinking Broken circuit: Orange LED blinking			
CONNECTION APABILITY	Detection loop max. output 0.5mA/DC24V			
TEMPERATURE	0°C ~50°C			-10°C ~50°C
DIMENSION	W:150×W:55mm	W:150×W:55mm	W:150×W:50mm	W:150×W:50mm
MATERIAL	Fire-proof plastics			